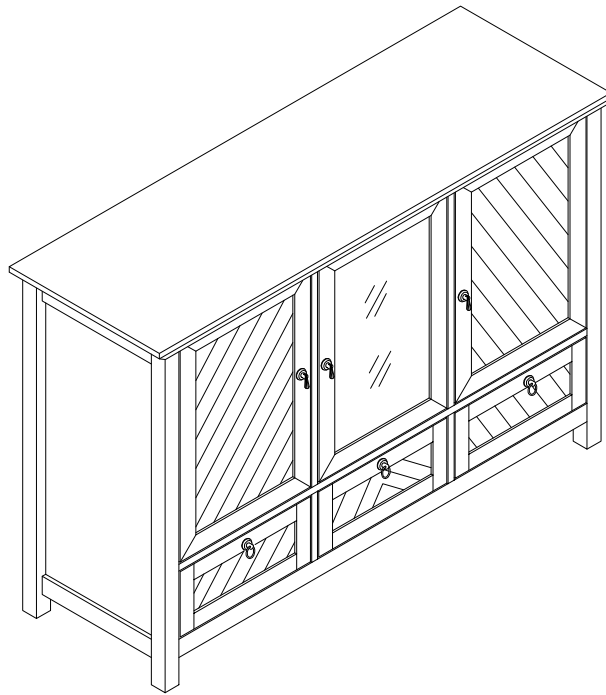


ASSEMBLY INSTRUCTIONS


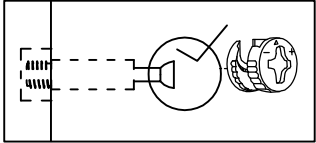

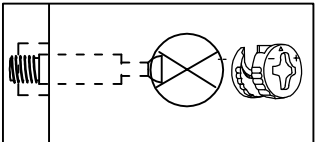

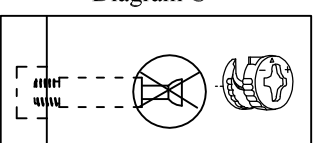
C1408 Console Table

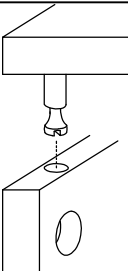
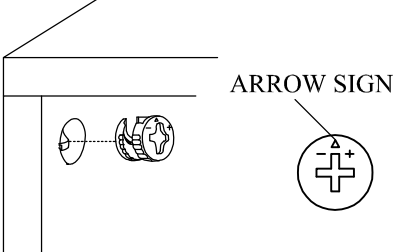
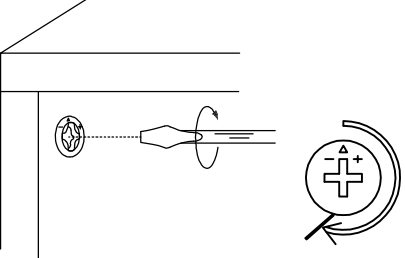


NOTE TO CUSTOMERS:

- For ease and speed of assembly we recommend that before you commence each step of the assembly that you identify all the parts required to complete that step.
- We recommend that where possible you allow sufficient space to assemble the item as close as possible to the place where it will be once assembled.
- For the protection of your furniture we recommend that the product is placed on protected surfaces during assembly to prevent any damage.
- During assembly do not over tighten, as this may damage the product.
- Please ensure you retain all the product packaging until the item completely assembled.
- Please periodically check all fittings and re-tighten as necessary.
- Please never allow any liquids to remain on your furniture as absorption can cause the wood to warp or finish to de-laminate.

To insert a cam lock: (Please read below instructions before assembling)






















	<p>Diagram A</p> 	<p>1. Insert cam screw into hole as shown in diagram A .</p>
	<p>Diagram B</p> 	<p>Make sure not to insert the cam screw: Too deep as shown in figure B as this will cause the cam screw to be misaligned and unable to interlock properly.</p>
	<p>Diagram C</p> 	<p>Also avoid inserting the cam screw too close to the surface of the hole as shown in figure C, as this will cause the cam lock to be too loose, and not interlock properly.</p>

	<p>2. Connect the panels together.</p>
	<p>3. When inserting the cam lock make sure the arrow of the cam lock faces the cam screw.</p>
	<p>4. To tighten the cam lock turn the cam lock clockwise 90-180 degree or until the arrow is facing opposite the place cam lock was inserted.</p>
<p>NOTE: DO NOT USE AN AUTOMATIC SCREWDRIVER TO TIGHTEN CAM LOCKS.</p>	












Note:

- Read these instructions carefully before assembling.
- Tools required : Phillips screwdriver, flat screwdriver.
- Find a clean, smooth area on which to work , such as a carpet, in order to avoid scratching the wood surfaces.
- Wait to dispose of the packing material until assembly is complete and all parts and hardware are accounted for.
- Two or more people might be required for assembly.

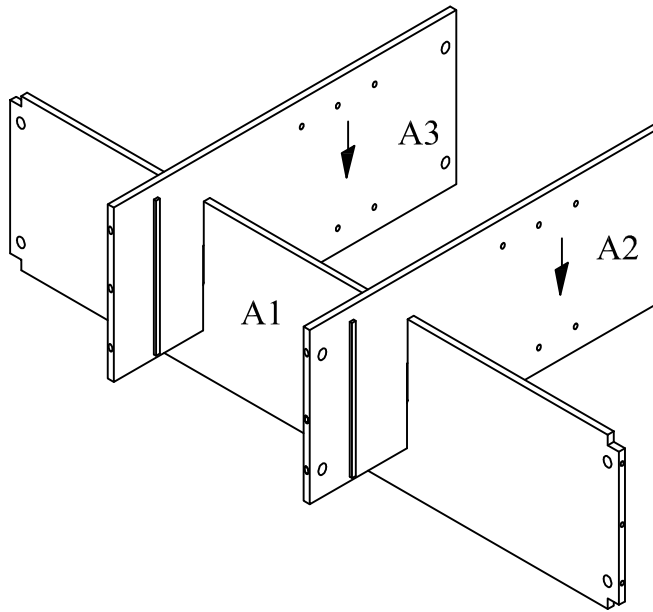
Part List

<p>A1. Quantity of 1</p>  <p>Middle Shelf Panel</p>	<p>A2. Quantity of 1</p>  <p>Left Middle Divider</p>	<p>A3. Quantity of 1</p>  <p>Right Middle Divider</p>	<p>A4. Quantity of 1</p>  <p>Bottom Panel</p>
<p>A5. Quantity of 1</p>  <p>Right Side Panel</p>	<p>A6. Quantity of 1</p>  <p>Left Side Panel</p>	<p>A7. Quantity of 1</p>  <p>Center Leg</p>	<p>A8. Quantity of 1</p>  <p>Top Panel</p>
<p>A9. Quantity of 2</p>  <p>Adjustable Shelf</p>	<p>A10. Quantity of 1</p>  <p>Center Adjustable Shelf</p>	<p>A11. Quantity of 1</p>  <p>Left Door</p>	<p>A12. Quantity of 1</p>  <p>Center Door</p>
<p>A13. Quantity of 1</p>  <p>Right Door</p>	<p>A14. Quantity of 6</p>  <p>Drawer Side Panel</p>	<p>A15. Quantity of 3</p>  <p>Drawer Back Panel</p>	<p>A16. Quantity of 3</p>  <p>Drawer Bottom Panel</p>
<p>A17. Quantity of 1</p>  <p>Left Drawer Front Panel</p>	<p>A18. Quantity of 1</p>  <p>Right Drawer Front Panel</p>	<p>A19. Quantity of 1</p>  <p>Center Drawer Front Panel</p>	<p>A20. Quantity of 2</p>  <p>Back Panel</p>
<p>A21. Quantity of 1</p>  <p>Center Back Panel</p>			

Hardware List

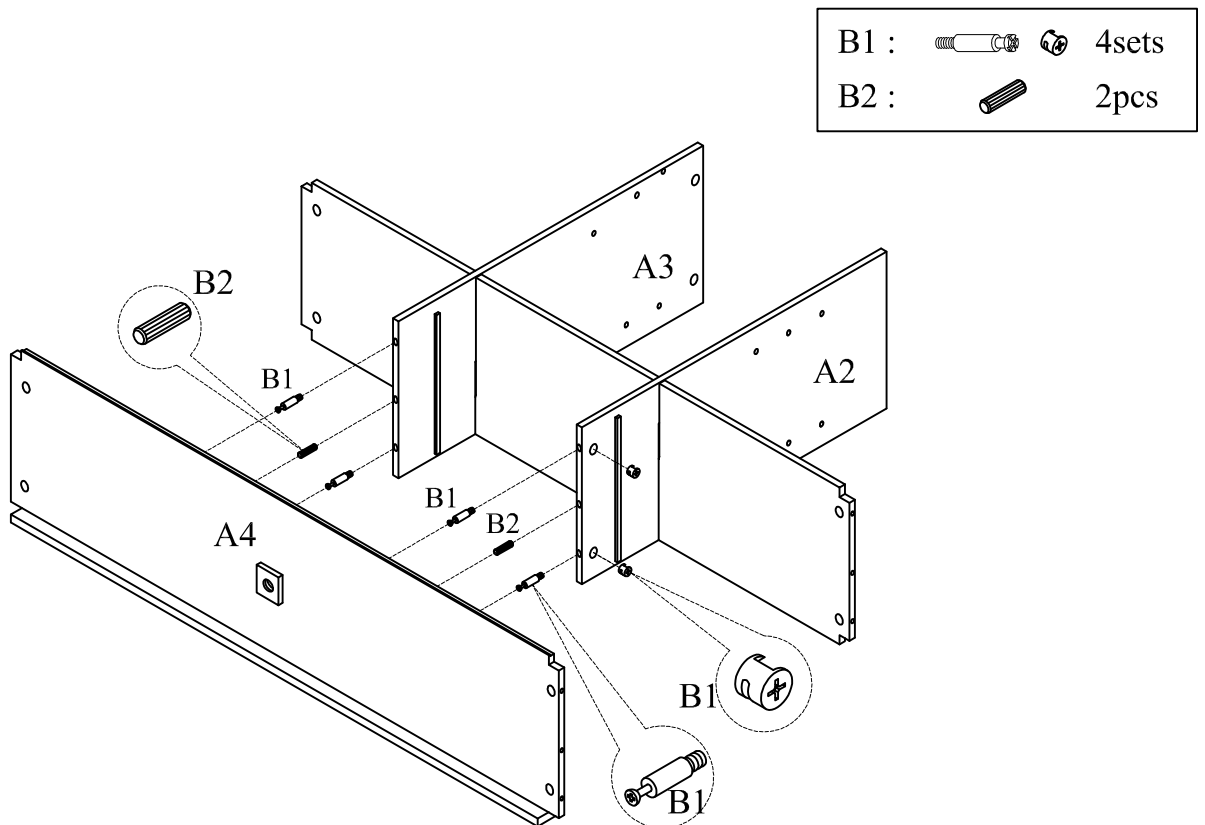
<p>B1</p> <p style="text-align: center;">Quantity of 20</p>  <p>Camlock</p>	<p>B2</p> <p style="text-align: center;">Quantity of 10</p>  <p>Wood Dowel</p>	<p>B3</p> <p style="text-align: center;">Quantity of 24</p>  <p>Screw</p>	<p>B4</p> <p style="text-align: center;">Quantity of 12</p>  <p>Shelf Support</p>
<p>B5</p> <p style="text-align: center;">Quantity of 3</p>  <p>Magnet with Screw</p>	<p>B6</p> <p style="text-align: center;">Quantity of 3</p>  <p>Stopper with Screw</p>	<p>B7</p> <p style="text-align: center;">Quantity of 3</p>  <p>Handle with Bolt</p>	<p>B8</p> <p style="text-align: center;">Quantity of 24</p>  <p>Screw</p>
<p>B9</p> <p style="text-align: center;">Quantity of 3</p>  <p>Handle with Bolt</p>	<p>B10</p> <p style="text-align: center;">Quantity of 1</p>  <p>Anchor with Screw</p>	<p>B11</p> <p style="text-align: center;">Quantity of 1</p>  <p>Anti-tip Kit</p>	

Step 1



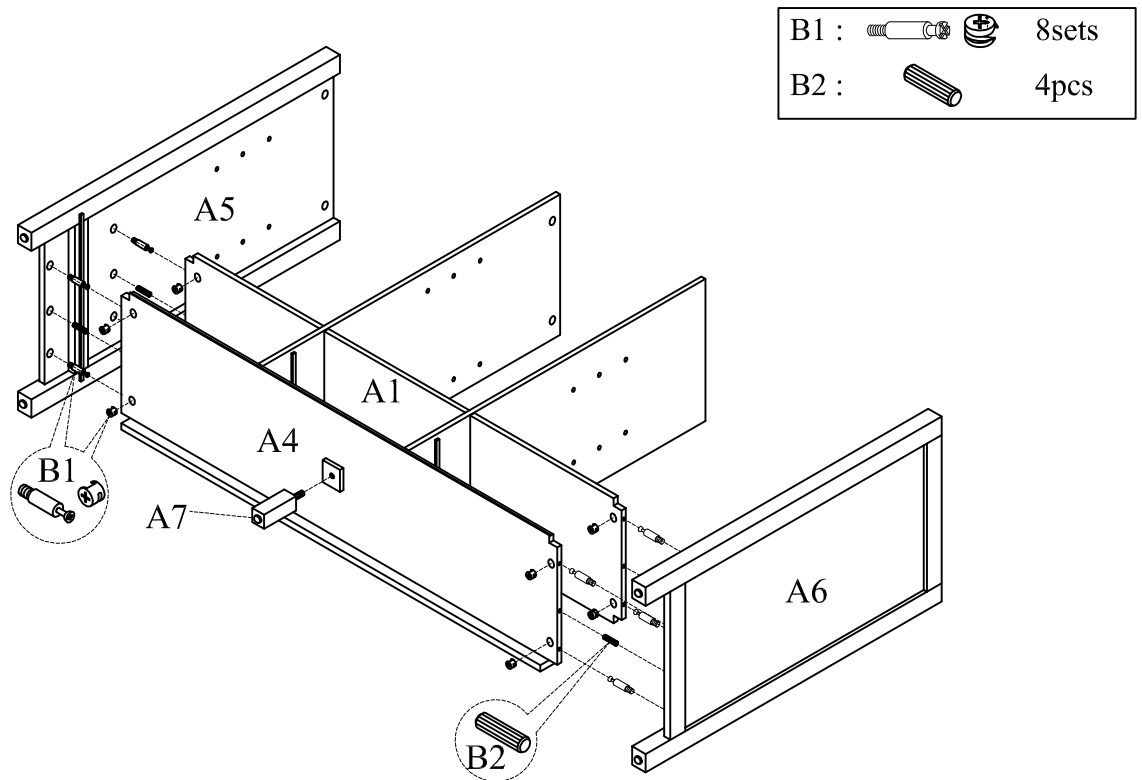
Insert Middle Dividers A2 & A3 into the grooves of Middle Shelf Panel A1 as shown above.

Step 2



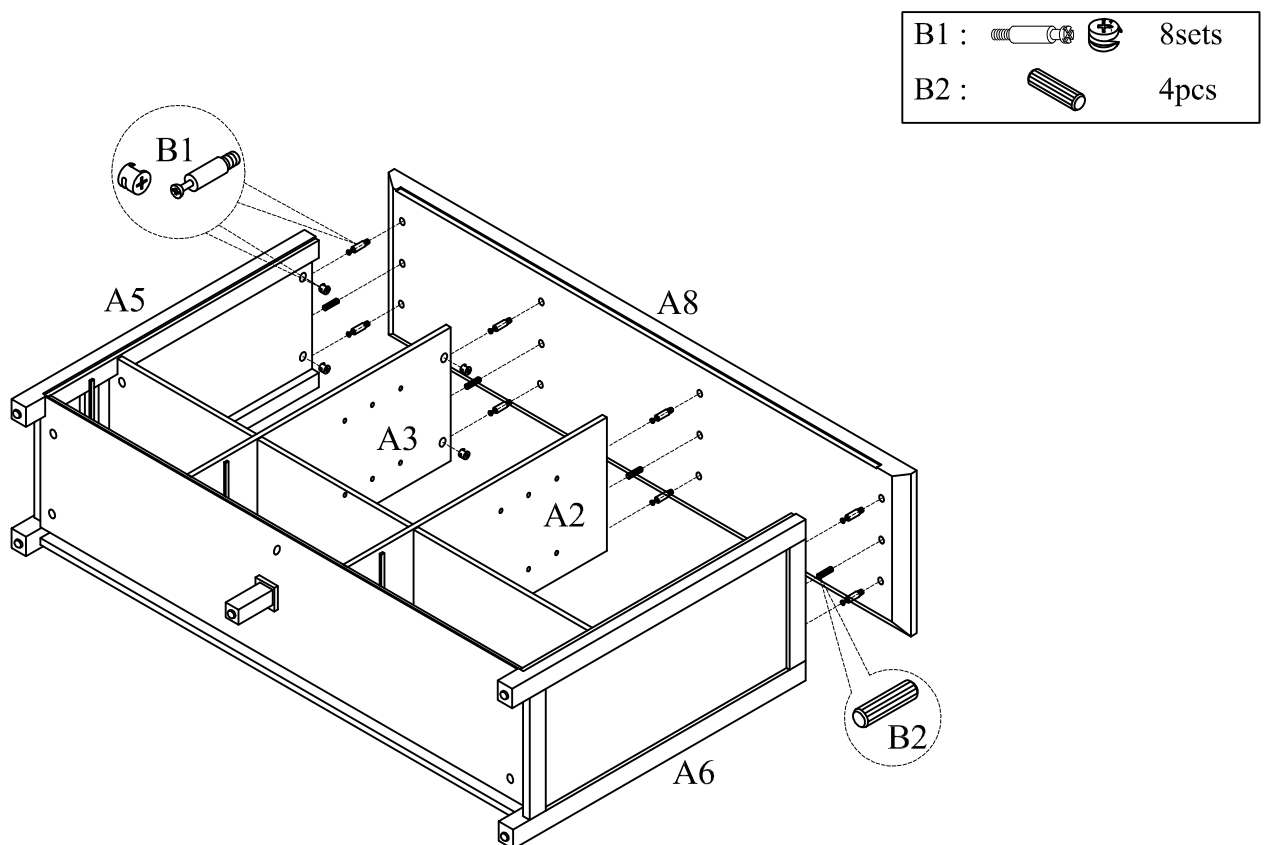
Assemble Bottom Panel A4 to Middle Dividers A2 & A3 using Camlocks B1 and Wood Dowels B2.

Step 3



- 1). Assemble Side Panels A5 & A6 to Middle Shelf Panel A1 and Bottom Panel A4 using Camlocks B1 and Wood Dowels B2.
- 2). Screw Center Leg A7 into the bottom of Bottom Panel A4.

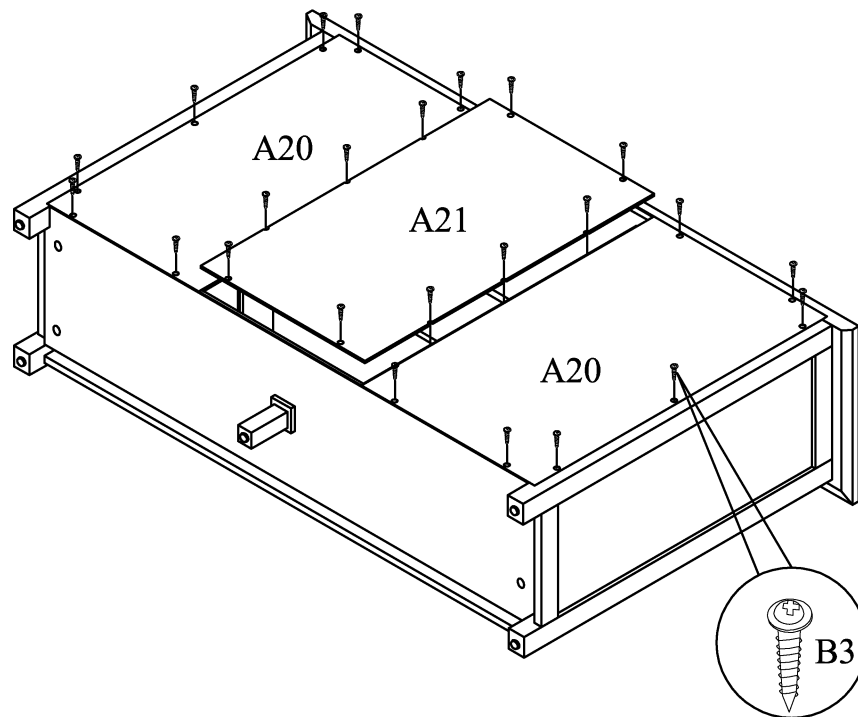
Step 4



Assemble Top Panel A8 to Middle Dividers A2 & A3 and Side Panels A5 & A6 using Camlocks B1 and Wood Dowels B2.




Step 5

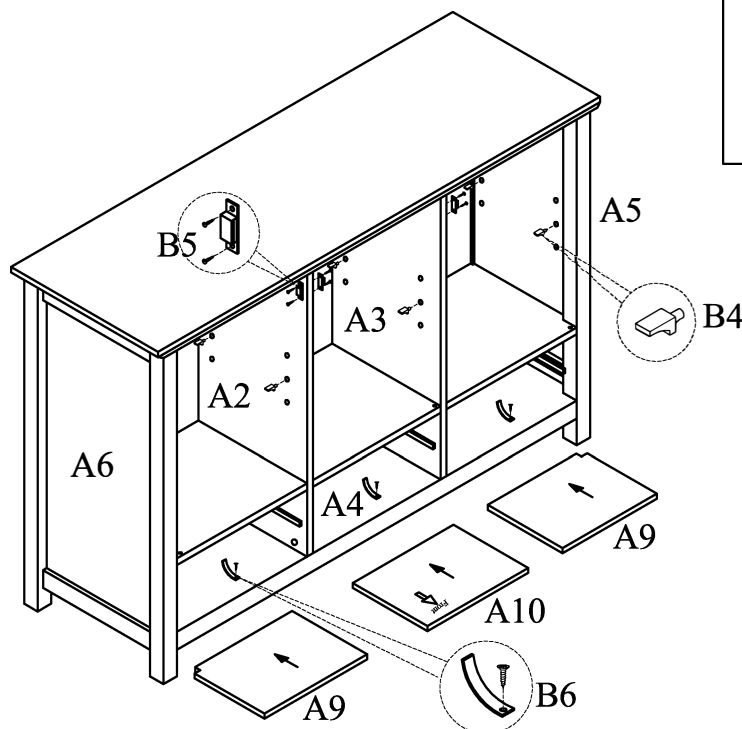
B3 :  24pcs



Assemble Back Panels A20 and Center Back Panel A21 to the back of this unit using Screws B3 as shown above.

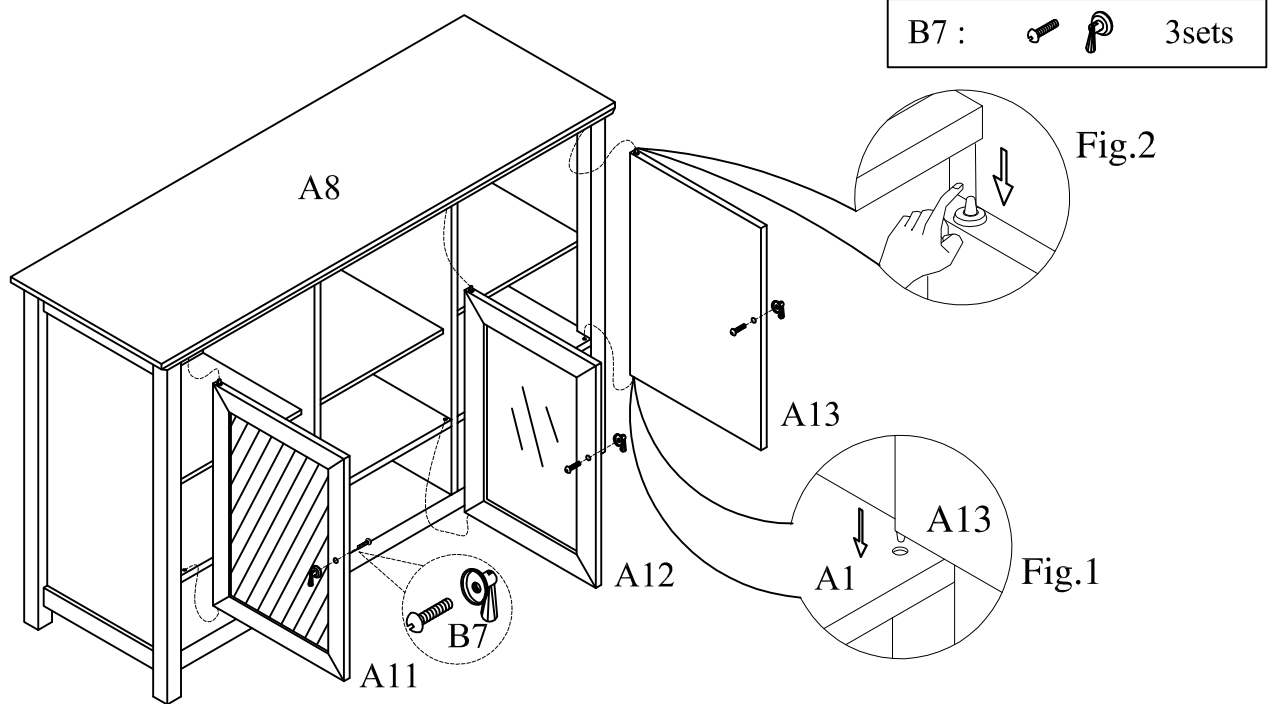
Step 6

B4 :  12pcs
B5 :  3sets
B6 :  3sets



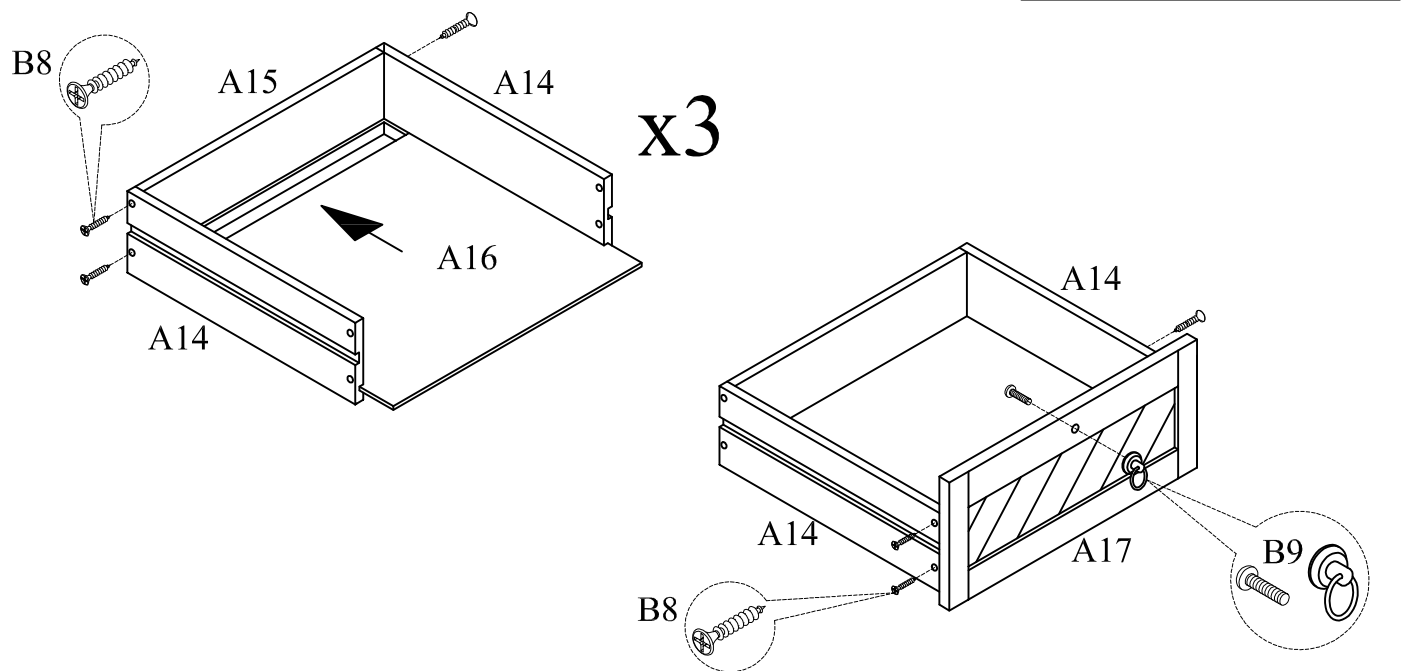
- 1). Attach Magnets B5 to Middle Dividers A2 & A3 using included screws.
- 2). Attach Stoppers B6 to Bottom Panel A4 using included screws.
- 3). Insert Shelf Supports B4 into the holes of Middle Dividers A2 & A3 and Side Panels A5 & A6, then place adjustable Shelves A9 and Center Adjustable Shelf A10 onto Shelf Supports B4.

Step 7



- 1). Connect Right Door A13 to Middle Shelf Panel A1 as above Fig.1.
- 2). Press the upper pin on Right Door A13 see Fig.2. and insert Right Door A13 carefully into the cabinet with the upper pin popping up into the holes of Top Panel A8.
- 3). Attach Handle B7 to Right Door A13 using included bolt.
- 4). Repeat above steps to assemble Left Door A11 and Center Door A12.

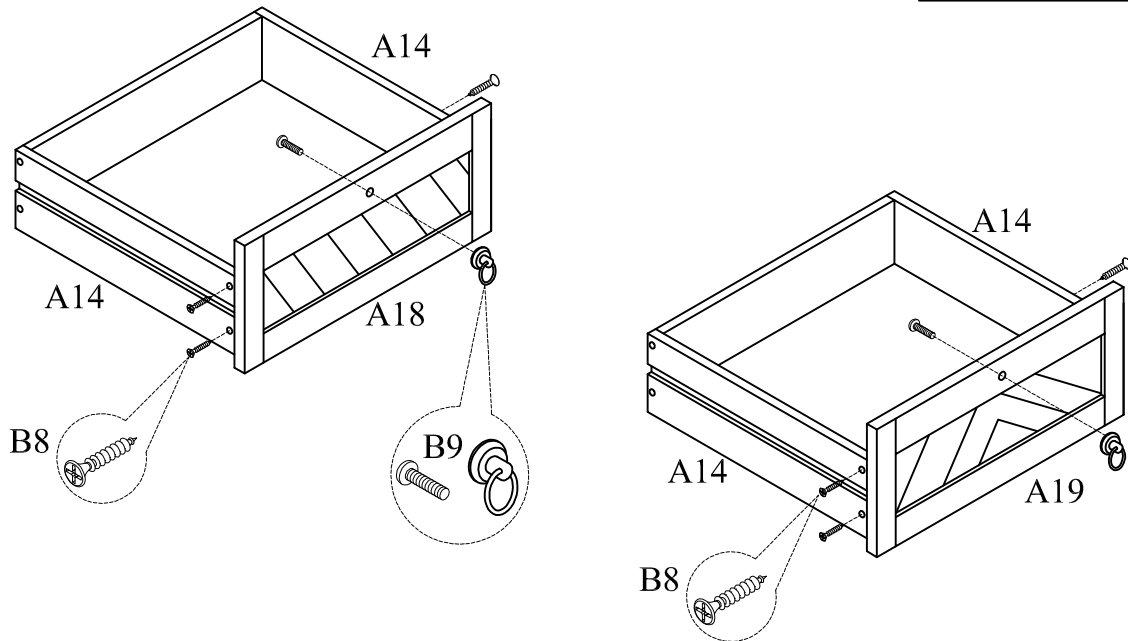
Step 8



- 1). Assemble Drawer Side Panels A14 to Drawer Back Panel A15 using Screws B8.
- 2). Insert Drawer Bottom Panel A16 into the grooves on Drawer Side Panels A14.
- 3). Assemble Left Drawer Front Panel A17 to Drawer Side Panels A14 using Screws B8, then attach Handle B9 to Left Drawer Front Panel A17 using included bolt.

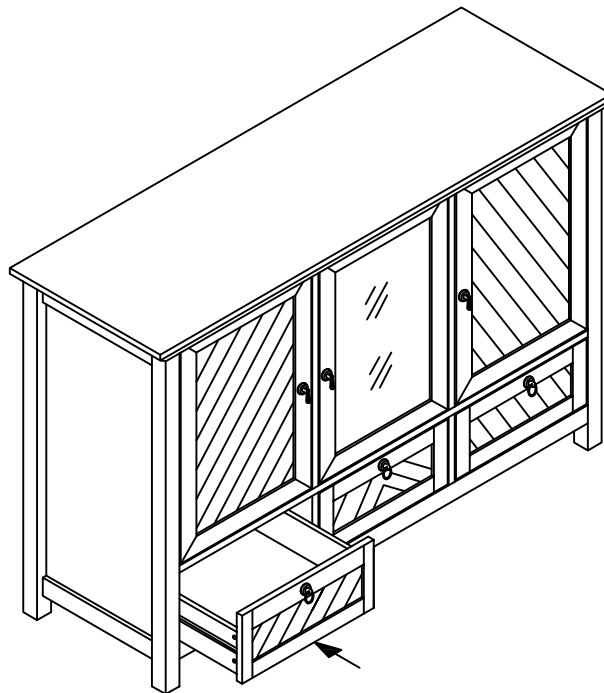
Step 9

B8 :		8pcs
B9 :		2sets



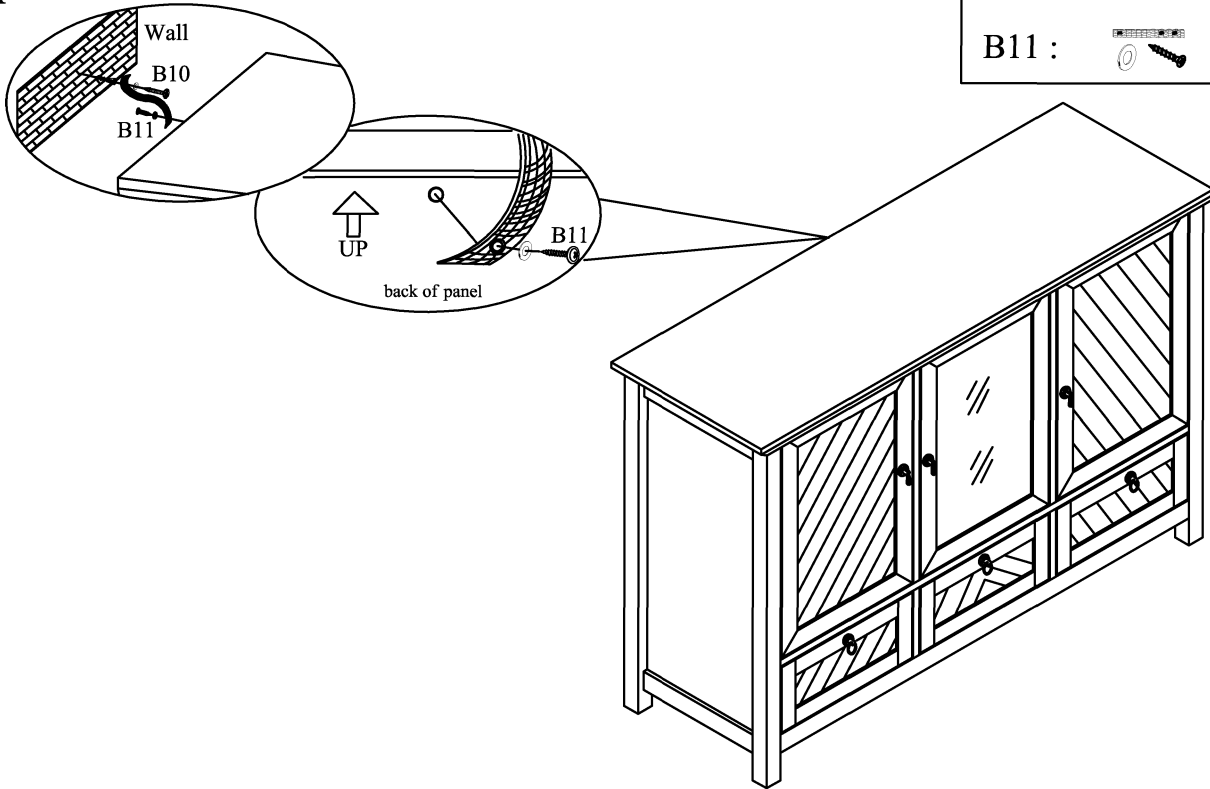
Assemble Right Drawer Front Panel A18 and Center Drawer Front Panel A19 to Drawer Side Panels A14 using Screws B8, then attach Handles B9 to Drawer Front Panels A18 & A19 using included bolts.



Step 10



Insert the drawers as shown above.

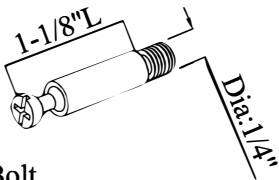




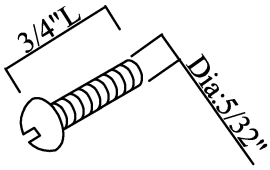



Step 11



- B10 :  1set
- B11 :  1set

Attach Anti-tip Kit B 11 nylon strap to the back of Top Panel A8, then attach the other end of the nylon strap to the wall using Anchor and Screw B 10 as shown above.

APPENDIX: Dimension of Hardwares in this AI.

<p>B1.</p>  <p>Cam-Bolt</p>	<p>B1.</p>  <p>Camlock</p>	<p>B2.</p>  <p>Wood Dowel</p>
<p>B3&B5.</p>  <p>Screw</p>	<p>B6.</p>  <p>Screw</p>	<p>B7&B9.</p>  <p>Bolt</p>
<p>B8.</p>  <p>Screw</p>	<p>B10.</p>  <p>Screw</p>	<p>B11.</p>  <p>Screw</p>