


ASSEMBLY INSTRUCTIONS

Style# WR1346 Wine Rack

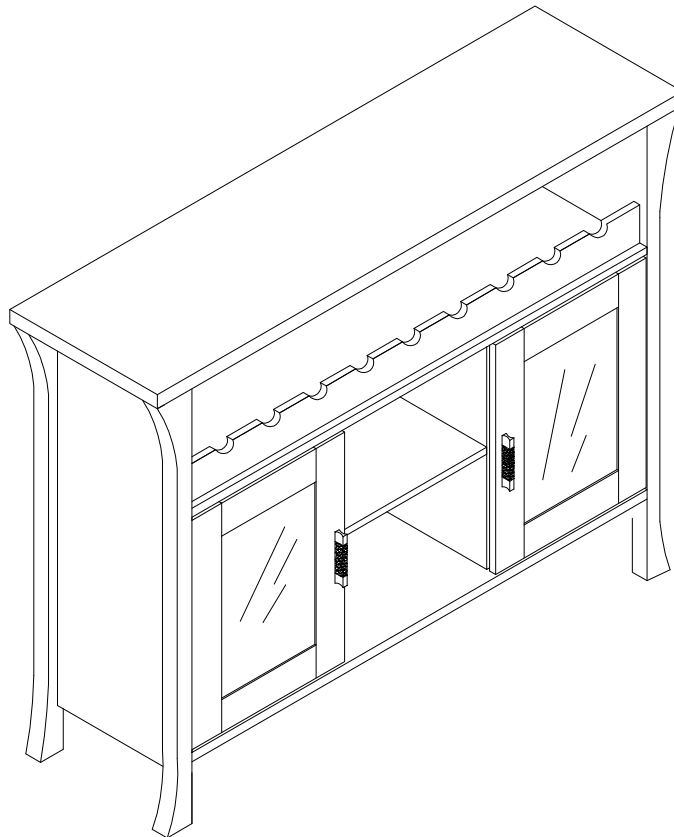

NOTE TO CUSTOMERS

- For ease and speed of assembly we recommend that before you commence each step of the assembly that you identify all the parts required to complete that step.
- We recommend that where possible you allow sufficient space to assemble the item as close as possible to the place where it will be once assembled.
- For the protection of your furniture we recommend that the product is placed on protected surfaces during assembly to prevent any damage.
- During assembly do not over tighten, as this may damage the product.
- Please ensure you retain all the product packaging until the item completely assembled.
- Please periodically check all fittings and re-tighten as necessary.
- Please never allow any liquids to remain on your furniture as absorption can cause the wood to warp or finish to de-laminate.
- It is recommended that this item should be assembled by two adults.

To insert a cam lock: (Please read below instructions before assembling)





Diagram A



1. Insert cam screw into hole as shown in diagram A .





Diagram B



Make sure not to insert the cam screw:
Too deep as shown in figure B as this will cause the
cam screw to be misaligned and unable to
interlock properly.







Diagram C




Also avoid inserting the cam screw too close to the
surface of the hole as shown in figure C, as this will
cause the cam lock to be too loose, and not interlock
properly.



2. Connect the panels together.

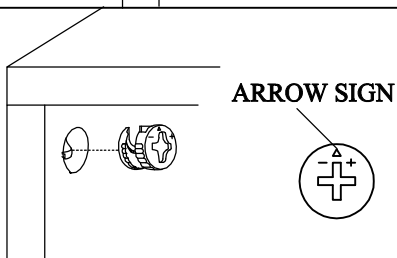

3. When inserting the cam lock make sure the arrow
of the cam lock faces the cam screw.

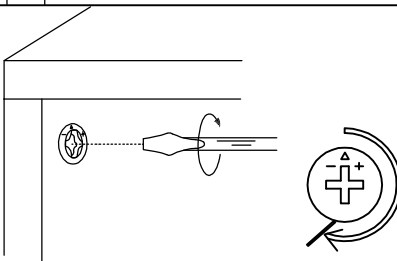















4. To tighten the cam lock turn the cam lock clockwise
90-180 degree or until the arrow is facing opposite
the place cam lock was inserted.

**NOTE: DO NOT USE AN AUTOMATIC
SCREWDRIVER TO TIGHTEN CAM LOCKS.**










Note:

- Read these instructions carefully before assembling.
- Tools required : Phillips screwdriver, flat screwdriver.
- Find a clean, smooth area on which to work , such as a carpet, in order to avoid scratching the wood surfaces.
- Wait to dispose of the packing material until assembly is complete and all parts and hardware are accounted for.
- Two or more people might be required for assembly.







Part List
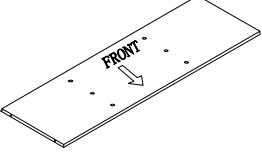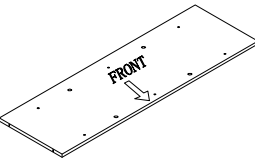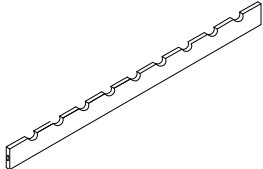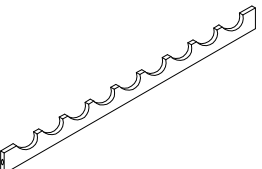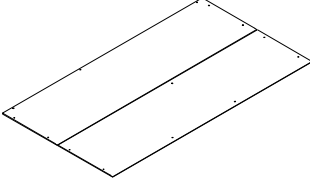
| | | | |
|---|--|--|--|
| <p>A1. Quantity of 1</p>  <p>Top Panel</p> | <p>A2. Quantity of 1</p>  <p>Side Panel (Left)</p> | <p>A3. Quantity of 1</p>  <p>Side Panel (Right)</p> | <p>A4. Quantity of 1</p>  <p>Bottom Panel</p> |
| <p>A5. Quantity of 2</p>  <p>Divider</p> | <p>A6. Quantity of 1</p>  <p>Middle Divider</p> | <p>A7. Quantity of 1</p>  <p>Front Cross Bar</p> | <p>A8. Quantity of 1</p>  <p>Back Cross Bar</p> |
| <p>A9. Quantity of 1</p>  <p>Door (Left)</p> | <p>A10. Quantity of 1</p>  <p>Door (Right)</p> | <p>A11. Quantity of 2</p>  <p>Adjustable Shelf</p> | <p>A12. Quantity of 1</p>  <p>Back Panel</p> |
| <p>A13. Quantity of 1</p>  <p>Center Leg</p> | <p>A14. Quantity of 1</p>  <p>Center Adjustable Shelf</p> | | |

Hardware List


| | | | |
|--|--|--|---|
| <p>(B1) Quantity of 14</p>  <p>Wood Dowel</p> | <p>(B2) Quantity of 24</p>  <p>Cam-bolt</p> | <p>(B3) Quantity of 24</p>  <p>Cam-Lock</p> | <p>(B4) Quantity of 12</p>  <p>Shelf Support</p> |
| <p>(B5) Quantity of 24</p>  <p>Screw</p> | <p>(B6) Quantity of 6</p>  <p>Screw</p> | <p>(B7) Quantity of 2</p>  <p>Magnet</p> | <p>(B8) Quantity of 2</p>  <p>Handle</p> |
| <p>(B9) Quantity of 4</p>  <p>Bolt</p> | | | |




APPENDIX: Dimension of Hardwares in this AI.

| | | |
|--|--|--|
| <p>B1.</p>  <p>Wood Dowel</p> | <p>B2.</p>  <p>Cam-bolt</p> | <p>B3.</p>  <p>Cam-Lock</p> |
| <p>B5.</p>  <p>Screw</p> | <p>B6.</p>  <p>Screw</p> | <p>B9.</p>  <p>Bolt</p> |


Step 1: Assemble Dividers (A5) to Bottom Panel (A4) using Cam Bolts (B2), Wood Dowels (B1) and Cam Locks (B3).




Step 2: Assemble Center Leg (A13) to the bottom of Bottom Panel (A4).

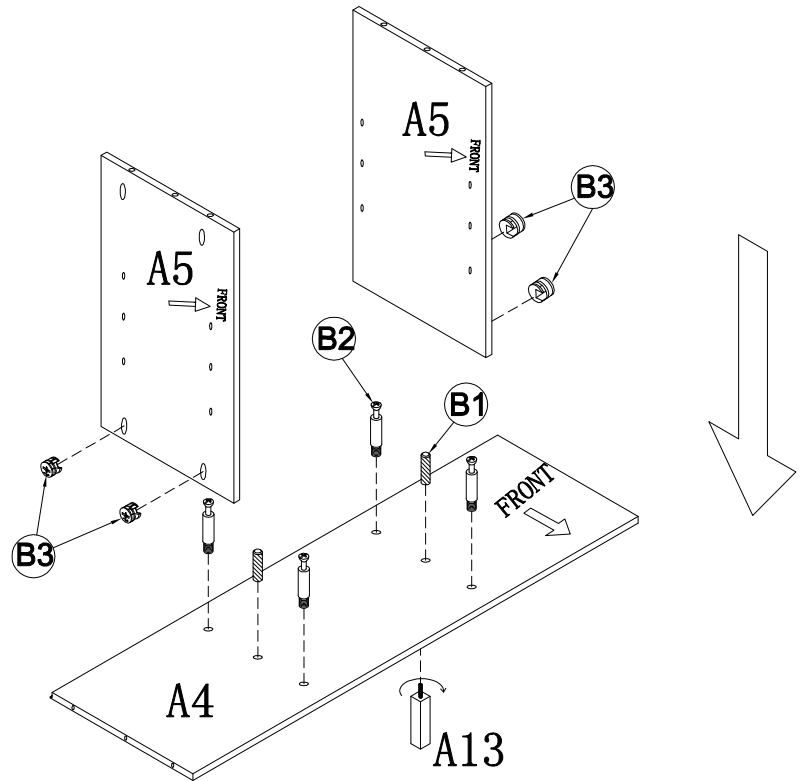


| | | |
|----|--|------|
| B1 |  | 2pcs |
| B2 |  | 4pcs |
| B3 |  | 4pcs |

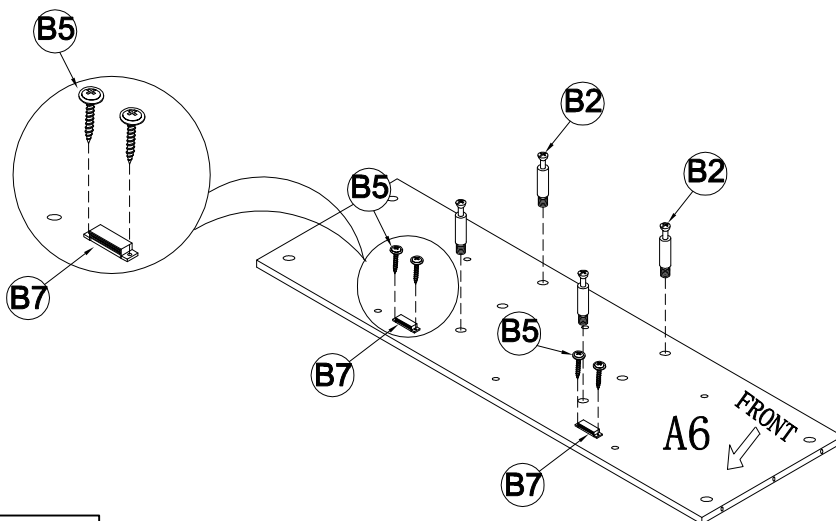

Step 3: Attach Magnets (B7) to Middle Divider (A6) using Screws (B5), please note the holes are pre-drilled.
 Step 4: Insert Cam Bolts (B2) into holes on Middle Divider (A6), then tighten them.




| | | |
|----|---|------|
| B2 |  | 4pcs |
| B5 |  | 4pcs |
| B7 |  | 2pcs |

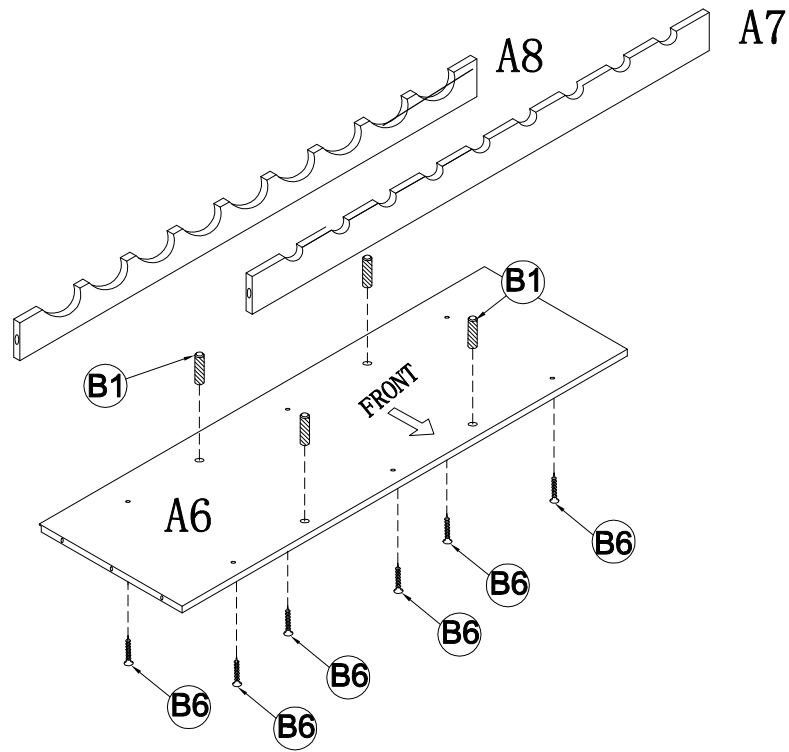

Step 5: Assemble Front Cross Bar (A7) and Back Cross Bar (A8) to Middle Divider (A6) using Screws (B6) and Wood Dowel (B1).




| | | |
|----|---|------|
| B1 |  | 4pcs |
| B6 |  | 6pcs |

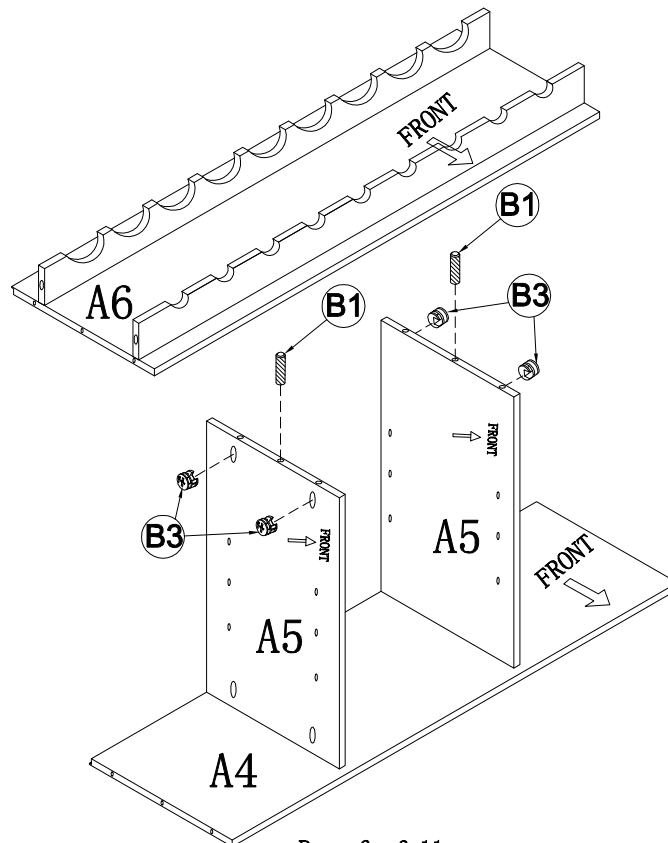

Step 6: Assemble Middle Divider (A6) to Dividers (A5) using Wood Dowels (B1) and Cam Locks (B3).




| | | |
|----|---|------|
| B1 |  | 2pcs |
| B3 |  | 4pcs |

Step 7: Insert Wood Dowels (B1) and Cam Bolts (B2) into holes on Side Panels (A2) &(A3), then tighten Cam-Bolts(B2).

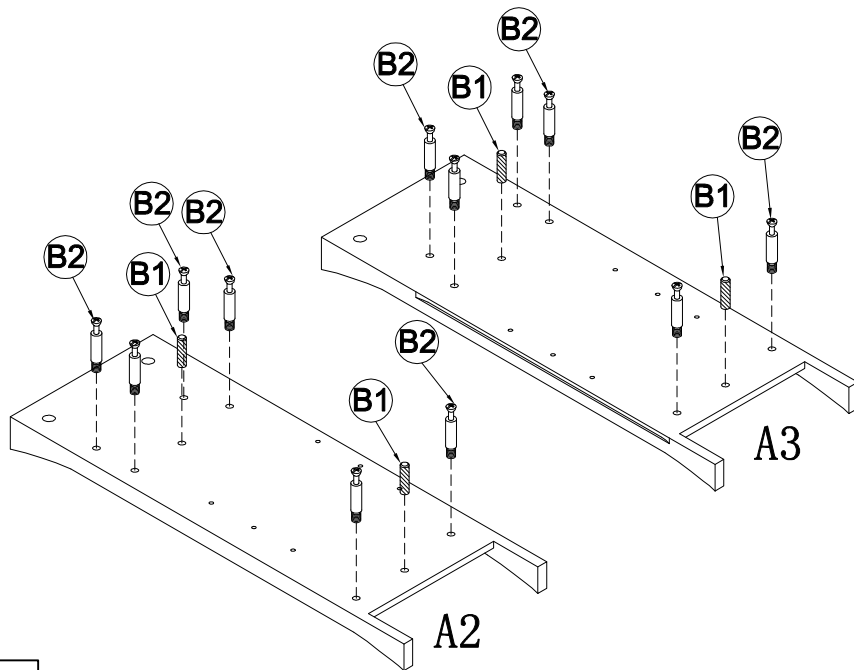


| | | |
|----|---|-------|
| B1 |  | 4pcs |
| B2 |  | 12pcs |

**Step 8: Assemble Left Side Panel (A2) to Bottom Panel (A4) and Middle Divider (A6) using Cam Locks (B3) .
Step 9: Repeat the Step 8 to assemble Right Side Panel (A3).**

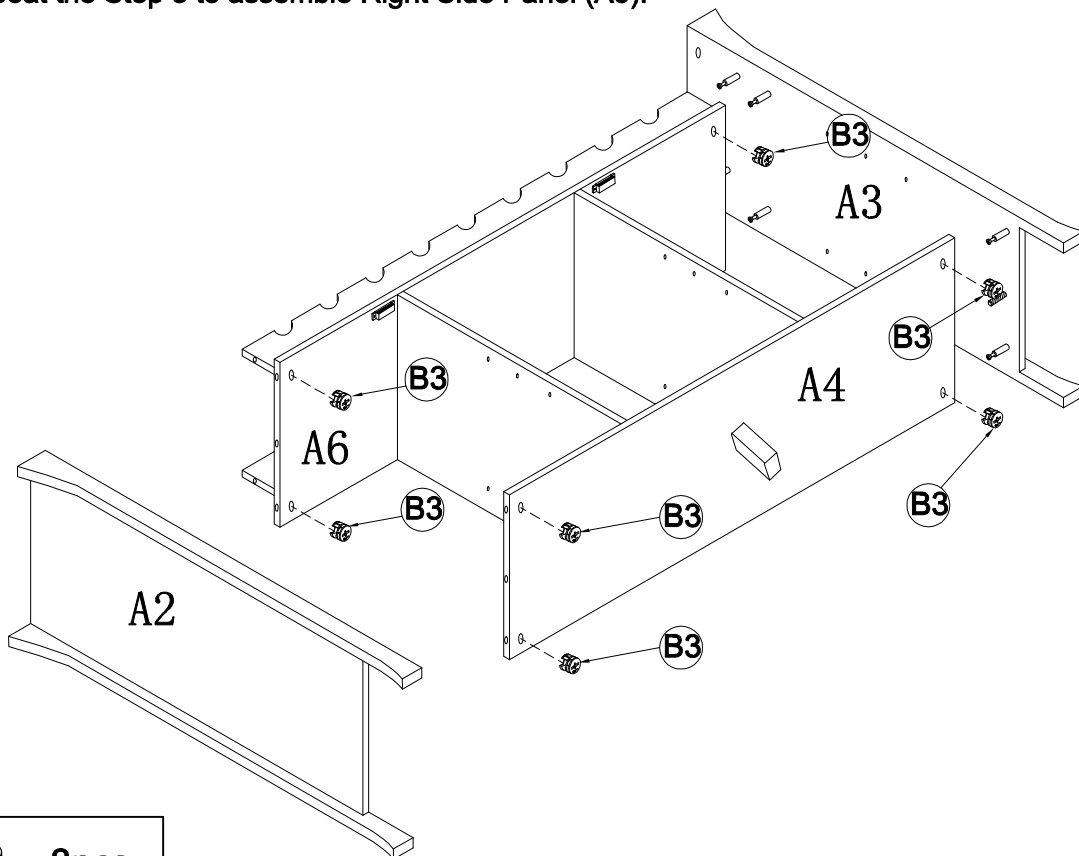


| | | |
|----|---|------|
| B3 |  | 8pcs |
|----|---|------|

Step 10: Insert Cam Locks (B3) into Front Cross Bar (A7) and Back Cross Bar (A8) to catch Cam Bolts(B2) on Side Panels (A2)&(A3).

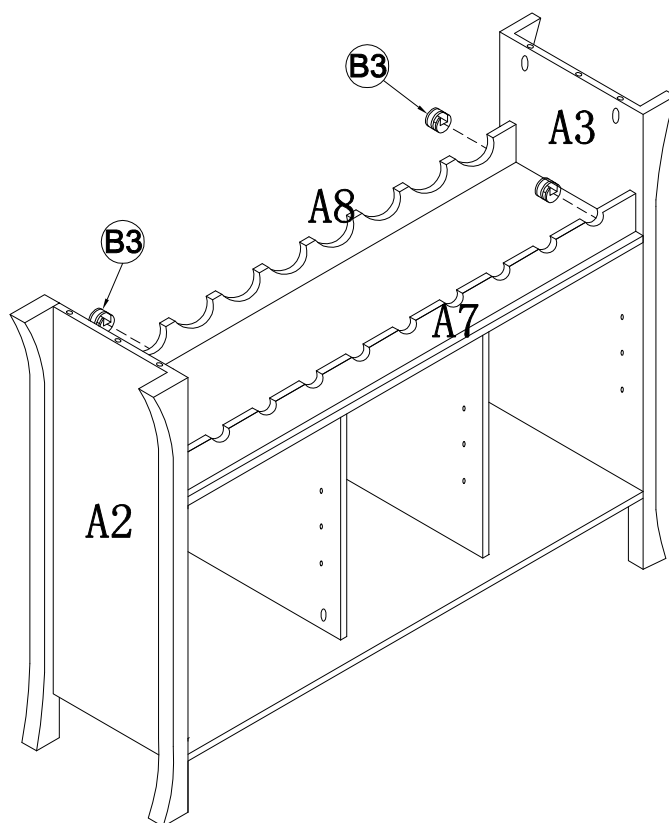

B3  4pcs


Step 11: Insert Wood Dowels (B1) and Cam Bolts (B2) into holes on the bottom of Top Panel (A1), then tighten Cam Bolts (B2).

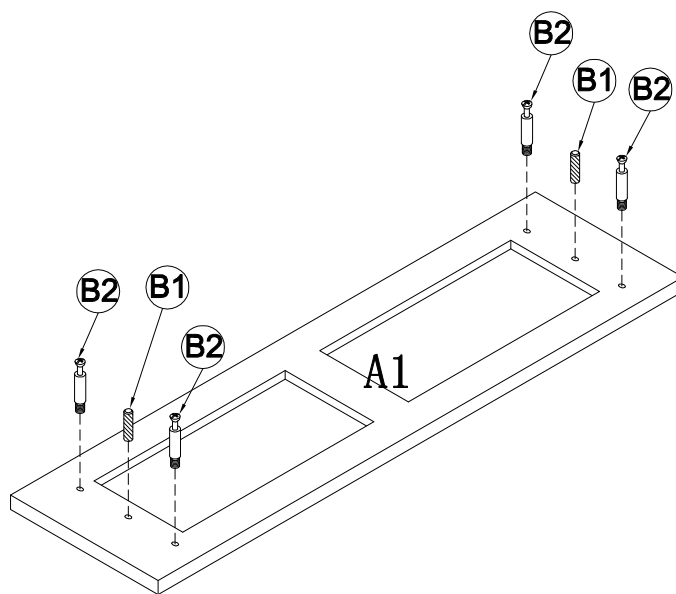


B1  2pcs


B2  4pcs


Step 12: Assemble Top Panel (A1) to Side Panels (A2) &(A3) using Cam Locks (B3).

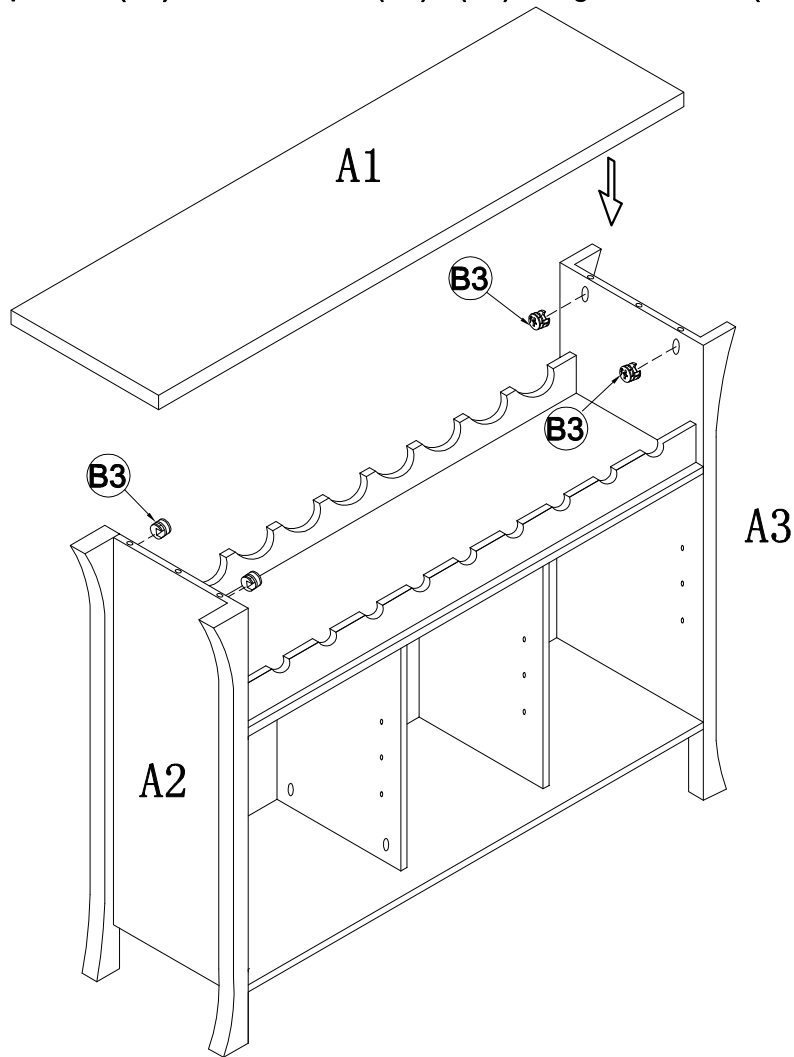


B3  4pcs

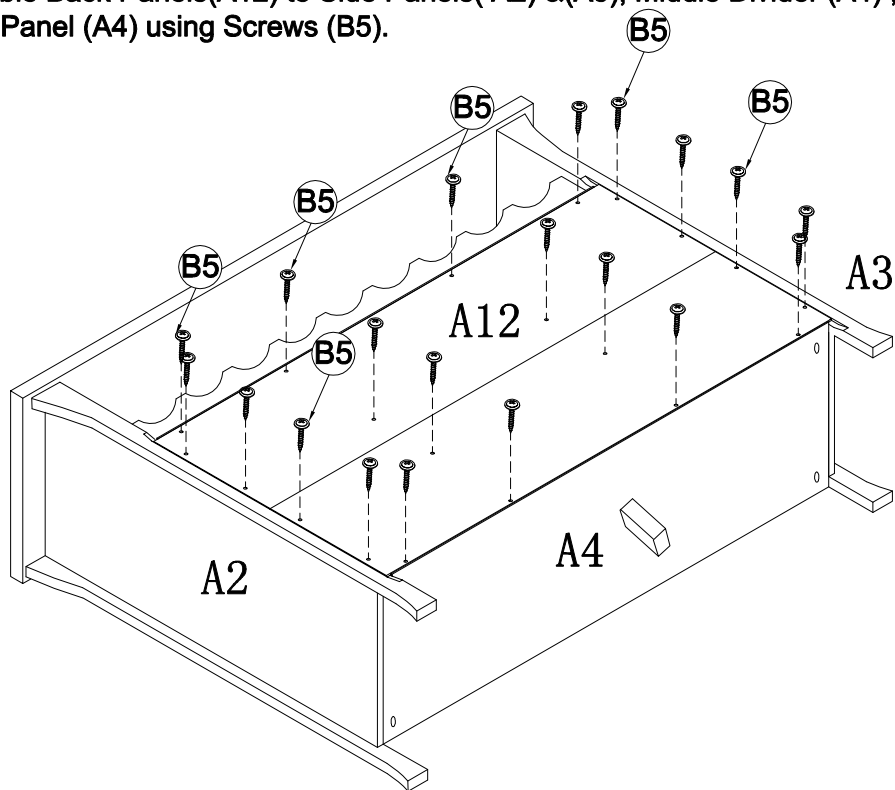

Step 13: Assemble Back Panels(A12) to Side Panels(A2) &(A3), Middle Divider (A4) , Divider Panels (A5) and Bottom Panel (A4) using Screws (B5).



B5  20pcs

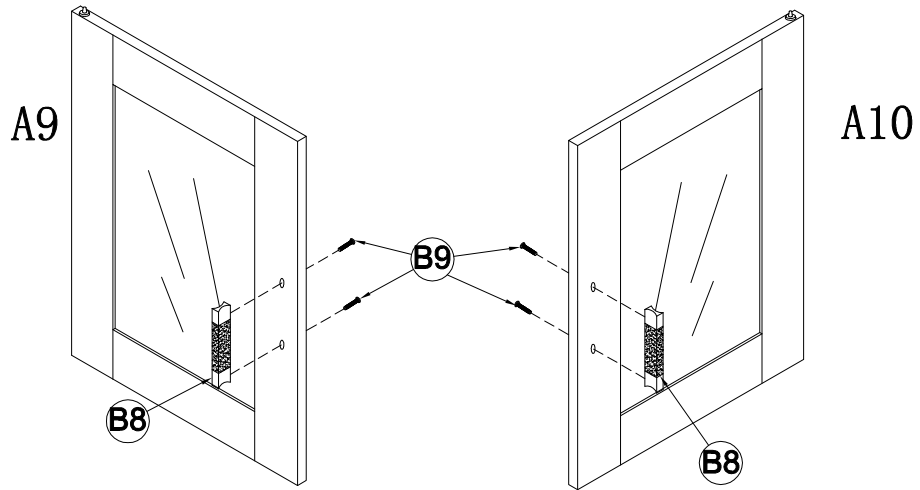
Step 14: Attach Handles (B8) to Doors (A9) &(A10) using Bolts (B9).




| | | |
|----|---|------|
| B8 |  | 2pcs |
| B9 |  | 4pcs |


Step 15: Connect Door (A10) to the Bottom Panel (A3) as below Fig.1.

Step 16: Press the upper pin on Door (A10) see Fig 2. and insert Door(A10) carefully into the cabinet with the upper pin popping up into the holes of Middle Divider (A6).

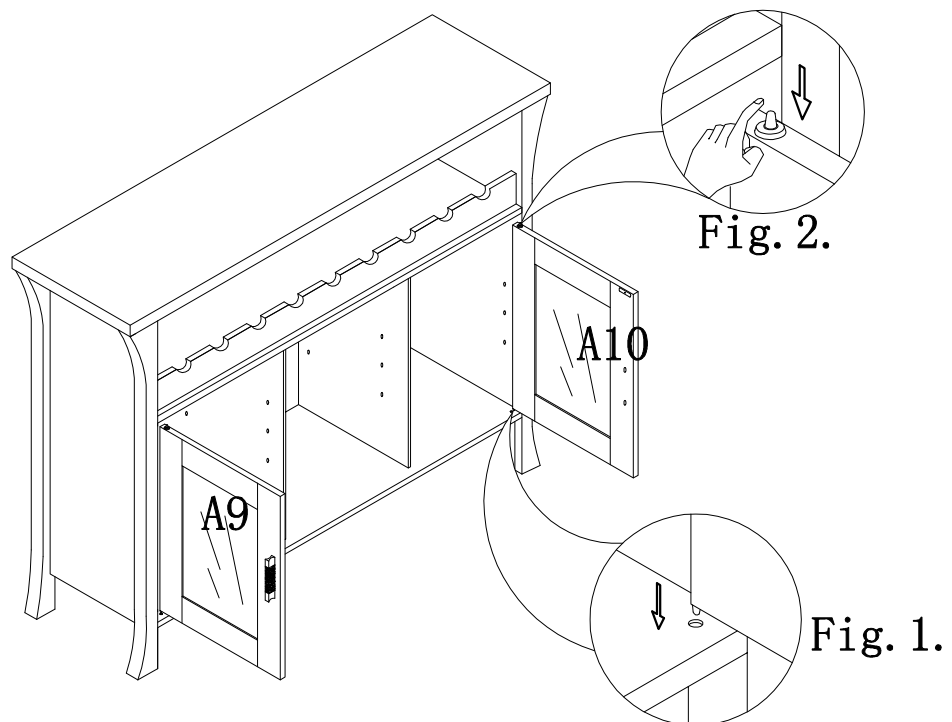

Step 17: Insert Shelf Supports (B4) into holes on Side Panels (A2) &(A3), Dividers (A5).

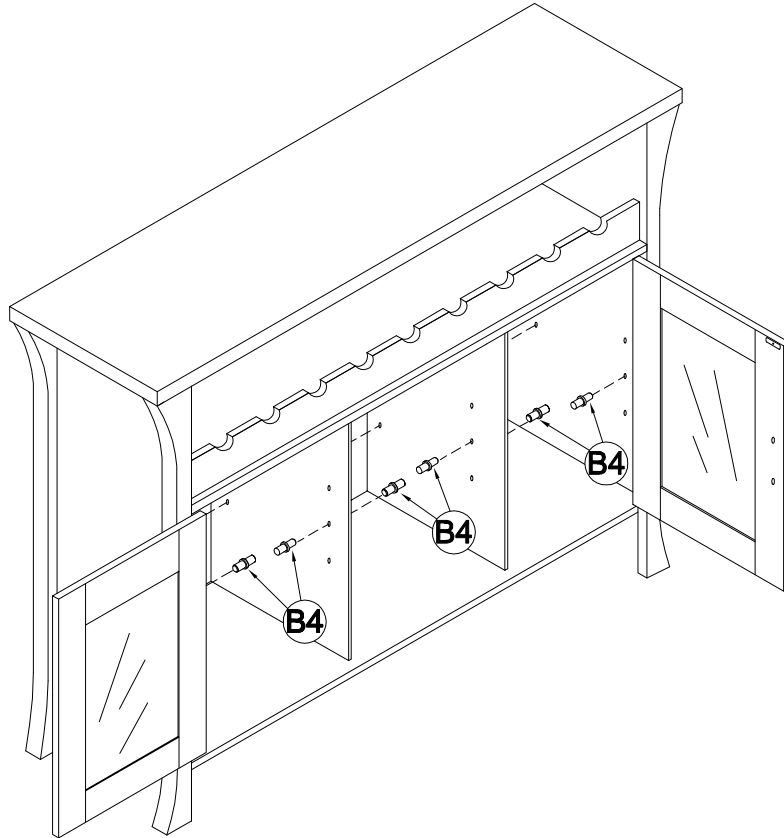

B4  **12pcs**

Step 18: Put Shelves (A11) and Center Shelf (A14) on Shelf Supports (B4).

